

Major 2.0 5531

Electro-hydraulic 4-post lift, 5.5 t capacity



Application

- Check-in
- Repair and maintenance
- Wheel alignment
- Testing

Description:

Posts:

- Integrated eccentric brake system
- Emergency stop valve
- Obstruction system
- Pneumatic parking system in height adjustable ratchets
- Pump unit with immersed motor and control unit on front left post
- Pushbutton control unit with alarm signal
- Hydraulic cylinder under left platform
- Lifting and lowering by means of cables
- Emergency lowering valve

Platforms:

- One movable platform as standard
- Platforms prepared for AUTOPSTENHOJ scissor jack

Standard colours:

- Platforms & posts: RAL 7016 – grey
- Ramps: RAL 3020 – red

Versions:

- Available with different voltages
- Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation
- S = flush platforms
- WL = with adjustable front recesses for turn tables and adjustable rear side slip plates supported by balls, center cover plate between recesses and side slip plates
- G = galvanized platforms
- 55 = 5500 mm platforms

Optional extras:

- Set of expansion bolts
- Extra control unit
- LED-lighting set
- Set of two 385 mm ramp extensions
- Set of two platform extensions (0.5 m)
- Pneumatic lock cylinder kit for slip plates

Special colours available on request!



Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GmbH


Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data	
Lifting capacity	5,500 kg
Lifting height	1,670 mm
Working height	1,890 mm
Lifting / lowering time	Standard: 32 / 26 sec.
Pump unit	Standard: 3 kW
Voltage	3x230 / 400V – 50 Hz – 25 / 16 A

Platforms	
Total length	55: 6,765 mm
Usable length of platform	55: 5,500 mm
Wheel base, min. - max.	51 S: max. 5,000 mm 51 WL: min. 1,800 mm, max. 4,500 mm
Platform width	630 mm
Distance between platforms	775 – 1,270 mm
Min. height	230 mm
Width between posts	3,100 mm
Total width - outer edges base plates	3,532 mm
Total height	2,235 mm

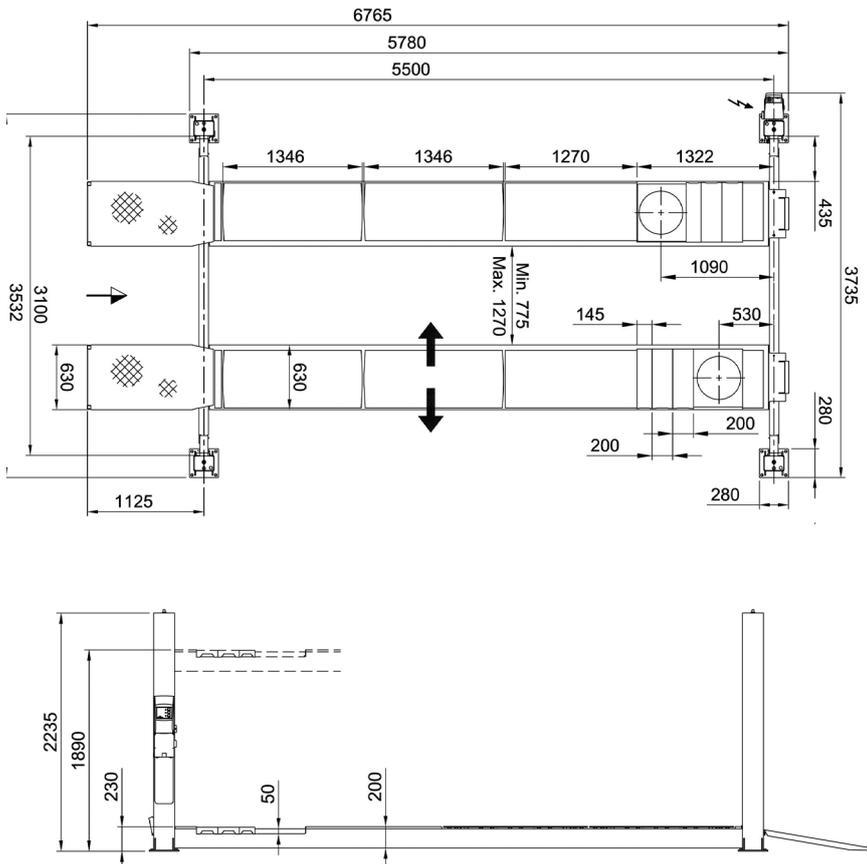

Ratchet for parking position



Pump and control unit on front left post



Pulley with steel cable