

**Performance**

Tipping load - Straight - Bucket	1392 kg
Tipping load - Straight - Forks	945 kg
Tipping load - Articulated - Bucket	1109 kg
Tipping load - Articulated - Fork	759 kg
Rated Operating Capacity - Straight - Bucket	696 kg
Rated Operating Capacity - Straight - Forks	473 kg
Rated Operating Capacity - Articulated - Bucket	554 kg
Rated Operating Capacity - Articulated - Forks	380 kg
Lift Capacity	1085 kg
Breakout Force - Boom	1141 kg

**Engine**

Make / Mode	KUBOTA / D1305-E4B-BC-1
Fuel	DIESEL
Cooling	53% PROPYLENE GLYCOL / 47% WATER MIXTURE
Power at 2600 RPM (ISO 14396)	18.2 kW
Torque at 1700 RPM (ISO 14396)	81.3 Nm
Number of cylinders	3 IN-LINE
Displacement	1 cm <sup>3</sup>

**Weight**

Operating weight	1903 kg
Shipping weight	1731 kg

**Hydraulic System**

System Relief	20.0 MPa
Implement Pump	ENGINE DRIVEN GEAR TYPE
Implement Pump Capacity	45.80 L/min
Main Filter	REPLACEABLE 16(c) ≥ 75 ISO 4572, SPIN ON WITH O-RING, 0.34 MPa [50 psi] BYPASS
Tank Breather Filter	NON-REPLACEABLE 10 MICRON, THREAD-ON CAP
Control Valve	MANUALLY OPERATED SERIES TYPE (LIFT & TILT FUNCTIONS) WITH FLOAT DETENT ON LIFT. E/H OPERATED PARALLEL TYPE (AUX & TELESCOPIC FUNCTIONS)
Hydraulic Fluid	PREMIUM GRADE, ANTI WEAR, MULTI VISCOSITY ISO VG46, PETROLEUM BASED

**Fluid Capacities**

Cooling System	5.70 L
Fuel tank	36.20 L
Engine Oil	3.80 L
Hydraulic and Hydrostatic System	20.80 L

**Drive System**

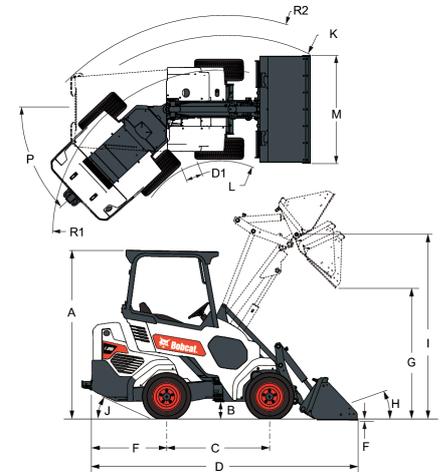
Transmission	4 Wheel Drive with automatic drive modes, Optional Traction assist function
--------------	---

**Electrical**

Alternator	90 A OPEN FRAME WITH INTERNAL REGULATOR
Battery	12 VOLT BCI GROUP 26; 540 AMPS COLD CRANKING CAPACITY AT 0 F (-18 C); 80 MINUTE RESERVE CAPACITY
Starter	12 V GEAR TYPE 2.0 kW [2.68 hp]
Ignition Switch	ACTIVATES STARTER AND INSTRUMENTATION

**Cycle times**

Raising time	2.6 s
Lowering time	2.2 s
Dump time	1.4 s
Rollback time	1.8 s

**Dimensions**


(A)	1983.7 mm	(J)	23.0°
(B)	196.0 mm	(K)	2407.7 mm
(C)	1200.0 mm	(L)	931.5 mm
(D)	3109.0 mm	(M)	1270.0 mm
(F)	19.5 mm	(O)	1180.7 mm
(G)	2136.4 mm	(P)	43.0°
(H)	30.0°	(Q)	40.0°
(I)	3107.1 mm		